





2016 in bronze with full view lites



2016 in bronze with painted bronze full view sections

COMMERCIAL 2000 SERIES

2" Thick R-17.66

- 2010 / 2012 / 2014 / 2016 / 2032 / 2033 / 2032-20 / 2033-20 / 2050 / 2051 / 2060 / 2061 / 2063 / 2064 / 2070 / 2071 / 2072 / 2073 / 2074 / 2080 / 2081 / 2082 / 2090



2000

The Strength To Keep Out Noise and Weather

Haas 2000 Series commercial insulated steel doors are manufactured with the elements in mind. They will enhance the beauty of your building while at the same time, insulate and dampen outside noise. Choosing high R-Value sectional doors will help increase energy efficiency and savings. Polyurethane insulation provides the highest R-Values available in sectional steel doors.

2000 series doors are reinforced with roll-formed galvanized steel struts and double-end hinges, as required to meet wind load specifications and to comply with ANSI/DASMA 102-2004. The protective coating system is found on both the interior and exterior steel.



2032 in white with large TL lites


2000 QUICK GUIDE

Model	Door Thickness	R-Value*	Max. Door Size		End Style Type	Section Skins	
			Width	Height		Inside	Outside
2010	2" (50.8mm)	17.66	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel
2012	2" (50.8mm)	17.66	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Woodgrain Steel
2014	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel
2016	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Woodgrain Steel
2032	2" (50.8mm)	17.66	24'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	20 GA Flush Smooth Steel
2033	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	20 GA V-Groove Smooth Steel
2032-20	2" (50.8mm)	17.66	24'-2"	32'-0"	Steel	20 GA V-Groove Smooth Steel	20 GA Flush Smooth Steel
2033-20	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	20 GA V-Groove Smooth Steel	20 GA V-Groove Smooth Steel
2050	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	24 GA V-Groove Stucco Aluminum	24 GA V-Groove Stucco Aluminum
2051	2" (50.8mm)	17.66	38'-2"	32'-0"	Steel	24 GA V-Groove Stucco Aluminum	24 GA Flush Stucco Aluminum
2060, 2072, 2082	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Short Panel Woodgrain Steel
2061, 2071, 2081	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Short Panel Woodgrain Steel
2063, 2073	2" (50.8mm)	17.66	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Long Panel Woodgrain Steel
2064, 2074	2" (50.8mm)	17.66	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Long Panel Woodgrain Steel
2070	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ranch Panel Woodgrain Steel
2080	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Raised Panel Woodgrain Steel
2090	2" (50.8mm)	17.66	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Sculptured Panel Woodgrain Steel

*calculated R-Value

Note: Certain weights and/or applications may limit the size allowed

DOOR PANELS




Flush Woodgrain

All Colors

Model 2010 Window Options: p 30-32

Model 2014 Window Options: p 32

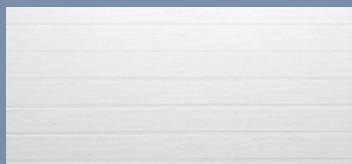


V-Groove Woodgrain

All Colors

Model 2012 Window Options: p 32

Model 2016 Window Options: p 32

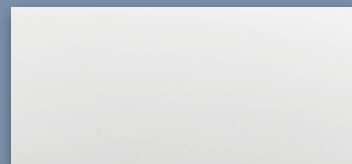


Flush Smooth

Polar White and Brown

Model 2032 Window Options: p 32

Model 2032-20 Window Options: p 32




V-Groove Smooth

Polar White and Brown

Model 2033 Window Options: p 32


Model 2033-20 Window Options: p 32

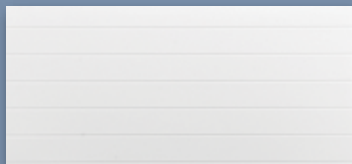

V-Groove Stucco Aluminum

Trinar® Polar White and Trinar® Almond

Model 2050 Window Options: p 32

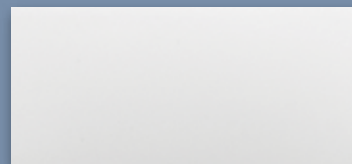

Flush Stucco Aluminum

Trinar® Polar White and Trinar® Almond

Model 2051 Window Options: p 32




Ribbed Short Woodgrain Panel

All Colors

Model 2060 Window Options: p 31

Model 2072 Window Options: p 32

Model 2082 Window Options: p 30

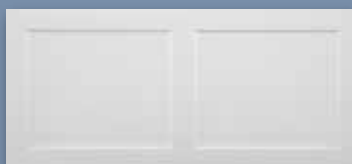


Recessed Short Woodgrain Panel

All Colors

Model 2061 Window Options: p 31

Model 2071 Window Options: p 32

Model 2081 Window Options: p 30

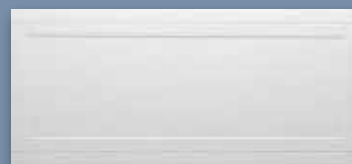


Recessed Long Woodgrain Panel

All Colors

Model 2063 Window Options: p 31

Model 2073 Window Options: p 32




Ribbed Long Woodgrain Panel

All Colors

Model 2064 Window Options: p 31

Model 2074 Window Options: p 32

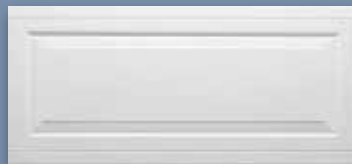

Ranch Woodgrain Panel

All Colors

Model 2070 Window Options: p 32



Raised Standard Woodgrain Panel

All Colors

Model 2080 Window Options: p 30




Sculptured Raised Woodgrain Panel

All Colors

Model 2090 Window Options: p 30

A Full Thermal Break is used in the tongue-and-groove construction of all 2000 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.



OPTIONS

2000 Series Available Options

- 2" or 3" Track
- Double Steel End Stiles
- Exhaust Port
- Cam Safety Device
- Spring Bumpers
- Chain Hoist
- High Cycle Springs
- Wind Load Rating
- Glazing (lites)
- High Cycle Rollers
- Aluminum Full View Section
- Pass Door
- Keyed Lock

Optional Exhaust Port (interior view)



For detailed information about the construction of this series, see pages 28-29

Pass Through Door (interior view)

